

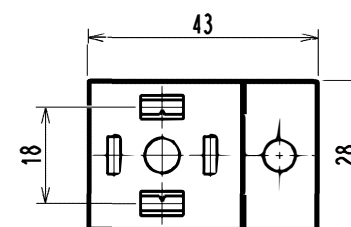



INDICATOR  
INDIKATOR

Case material Material ohijsja	PA66+30%FV
Spacing Razmak	18 mm
Working temperature Delovna temperatura	-25°C / +90°C

PART NUMBER SIFRA ARTICLA	DESCRIPTION NAZIV	REVISION VERZIJA	MASS TEZA [kg]	LED	VOLTAGE [V]
1281097	INDICATOR-EAGRZ	B	0,018	RED RDECA	12V
1281100	INDICATOR-EAGR	B	0,018	RED RDECA	24V
1281127	INDICATOR-EAJR	B	0,018	RED RDECA	110V
1281135	INDICATOR-EAKR	B	0,018	RED RDECA	250V



PAGE	LOCATION	VERSION	PRED REVIZIJO / WAS BEFORE REVISION	
DATE:	IME / NAME:		ONT / ECO:	
SURFACE:	mm <sup>2</sup>	SCALE / MERILLO:	1:1	
MASS:	Kg	PT-INDICATOR-EAXX		
CREATED / IZDELANO on / no: 23-Aug-2016 by / od: PAJTIKOVA ECO: 16466			<small>CONFIDENTIALITY AND INTELLECTUAL PROPERTY RIGHTS: PROTECTED DOCUMENT. REFER TO PROTECTION NOTICE ISO 15016 ZARJENOST IN INTELAKTUALNA LASTNINA: ZARJENI DOKUMENT SE NAMASA NA ZAPIS O ZARJENI ISO 15016 TRANSLATION: SLOVENIAN SPECIFICATIONS WILL BE THE REFERENCE IN CASE OF DISPUTE PREVOD: SLOVENSKE SPECIFIKACIJE BODO REFERENCA V PRIMERU RAZPRAVE</small>	
CHECKED / PREGLEDANO by / od: ERZNOZNIK	FORMAT FORMAT	A3	CAD : CREO PAGE / STRAN : 1 / 1	VERSION A
			CADDOC - 0459940	